

MYERS® C28-20 HIGH PRESSURE RECIPROCATING PISTON PUMP



Over a century of experience has proven that the Pentair's Myers line of reciprocating pumps are designed and built with performance you can rely on. Our C28-20 high pressure reciprocating pump combines manufacturing expertise and application understanding for a pump that is perfect for a variety of high pressure jobs. For details, contact your Pentair sales representative, or customer service at 419-289-1144.

ADVANTAGES BY DESIGN

HANDLES WIDE RANGE OF DEMANDING INDUSTRIAL APPLICATIONS.

- High-strength fluid end and spring-loaded flat valves for high pressure pumping (up to 2,000 psi) of large water volumes.
- Pumps liquids to 180°F in mine, mill, food processing, car wash, sewer cleaner and other applications.

PRODUCT CAPABILITIES, SPECIFICATIONS

Catalog Number	Max. Rated Capacity GPM (LPM)	Max. Rated Pressure PSI (Bar)	Temp. Rating °F (°C)	Size in inches (mm)						Approx. Wgt. Lbs. (kg)
				Cylinder Bore	Piston Stroke	Suction Size NPT	Discharge Size NPT	Input Shaft	Keyway	
C28-20 Triplex	27.9 (132.49)	2000 (138)	180 (82)	1 1/2 (38.1)	1 3/4 (44.45)	1 1/2	1	1 3/8 (34.93)	5/16 x 5/32 (7.94 x 3.97)	230 (104.2)

HORSEPOWER REQUIREMENTS

GPM	RPM	Horsepower Required For:							
		600 PSI	800 PSI	1000 PSI	1200 PSI	1400 PSI	1600 PSI	1800 PSI	2000 PSI
12.5	325	52	6.9	8.6	10.3	120	13.8	15.5	17.2
16.4	425	6.7	9.0	11.2	13.5	15.7	18.0	20.2	22.5
20.2	525	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8
24.1	625	9.9	13.2	16.5	19.8	23.1	26.4	29.8	33.1
27.9	725	11.5	15.3	19.2	23.0	26.8	30.7	34.5	38.3


KILOWATT PERFORMANCE DATA

LPM	RPM	Kilowatts Required For:							
		41.4 BAR	55 BAR	70 BAR	82.7 BAR	96.6 BAR	110.4 BAR	124.2 BAR	138 BAR
47.4	325	3.8	5.1	6.5	7.7	9.0	10.2	11.5	12.8
62.0	425	5.0	6.7	8.5	10.0	11.7	13.4	15.1	16.7
76.6	525	6.2	8.2	10.5	12.4	14.5	16.5	18.6	20.7
91.1	625	7.4	9.8	12.5	14.8	17.2	19.7	22.2	24.6
105.7	725	8.6	11.4	14.5	17.1	20.0	22.8	25.7	28.6


- Horsepower required is based upon 85% overall efficiency.
- Formula: (1) HP required = $\frac{\text{GPM} \times \text{PSI}}{1457}$ or $\text{KW} = \frac{\text{LPM} \times \text{BAR}}{511}$
(2) Expected GPM = $\frac{\text{Rated GPM} \times \text{Working RPM}}{\text{Rated RPM}}$
Expected LPM = $\frac{\text{Rated LPM} \times \text{Working RPM}}{\text{Rated RPM}}$
Motor shieve = $\frac{\text{Pump shieve} \times \text{Pump RPM}}{\text{O.D. size} \times \text{Motor RPM}}$

NOTE: Horsepower requirements for an internal combustion engine (gas or diesel) may be obtained by multiplying the figures listed by 1.3. Do not exceed 80% of the manufacturer's advertised horsepower at operating RPM.

FLUID END

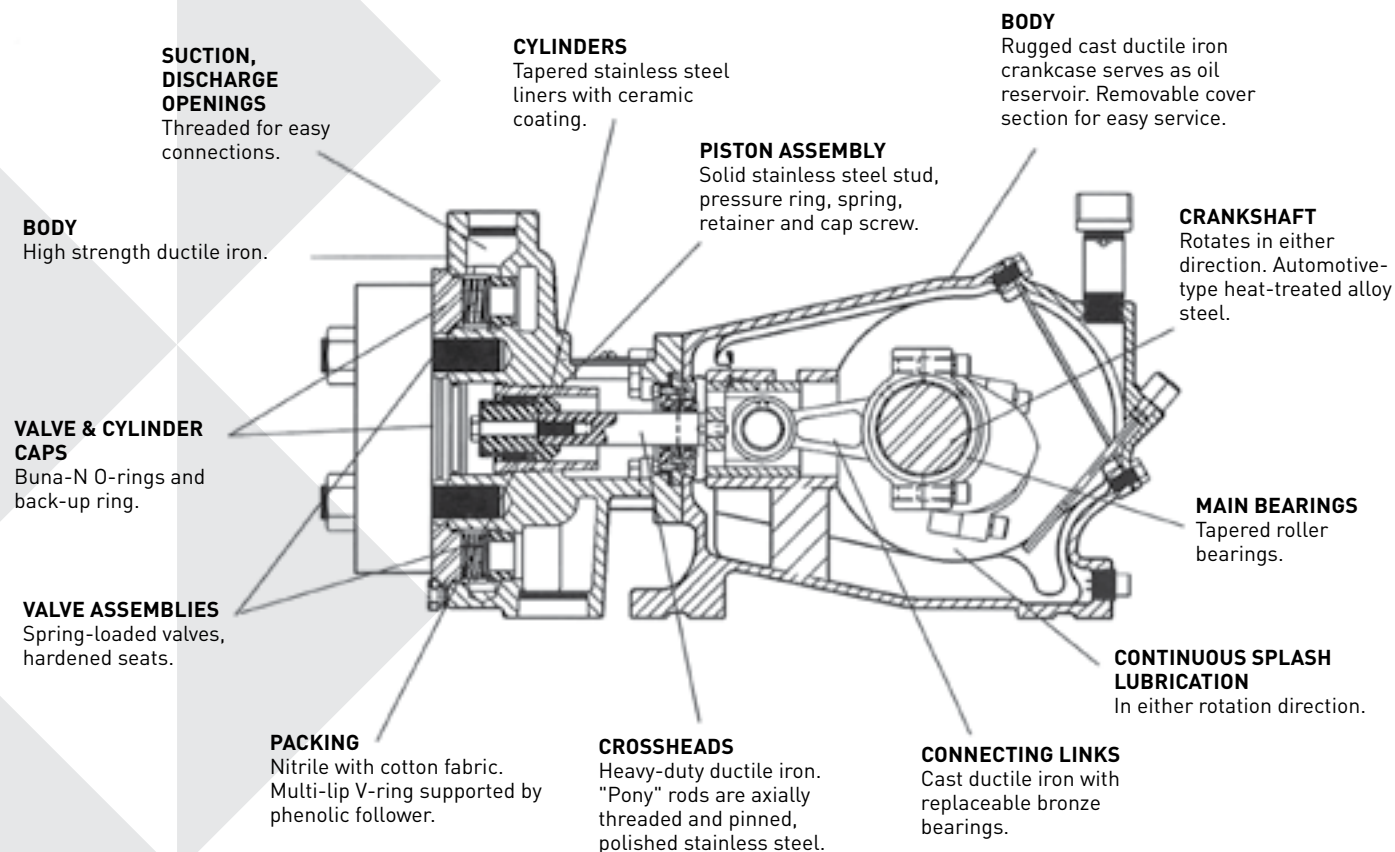

DIMENSIONS

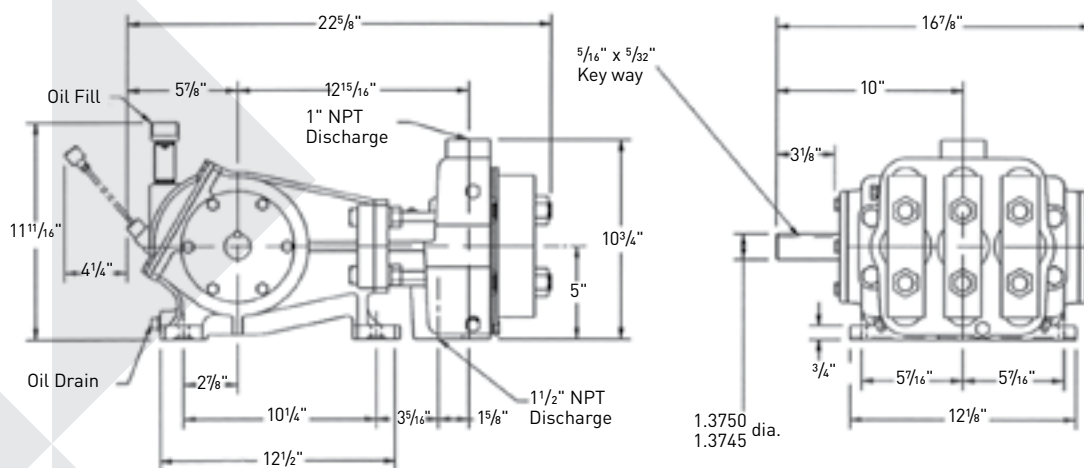

CALDER

+44 1905 751790
sales@calder.co.uk
www.calderltd.com